CONFIDENTIAL

NACA RM L57F10

CASE FILE COPY

NACA

RESEARCH MEMORANDUM

FREE-FLIGHT INVESTIGATION OF COMPARATIVE ZERO-LIFT

ROLLING EFFECTIVENESS OF A LEADING-EDGE AND

A TRAILING-EDGE AIR-JET SPOILER

ON AN UNSWEPT WING

By Alan B. Kehlet

Langley Aeronautical Laboratory
Langley Field, Va.

CLASSIFICATION CHANGED TO UNCLASSIFIED
AUTHORITY: NASA TECHNICAL PUBLICATIONS
ANNOUNCEMENTS NO. 9
EFFECTIVE DATE: SEPT. 1, 1959   WHL

NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS
WASHINGTON
August 1, 1957

CONFIDENTIAL

CONFIDENTIAL

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

FREE-FLIGHT INVESTIGATION OF COMPARATIVE ZERO-LIFT

ROLLING EFFECTIVENESS OF A LEADING-EDGE AND

A TRAILING-EDGE AIR-JET SPOILER

ON AN UNSWEPT WING

By Alan B. Kehlet

SUMMARY

A free-flight investigation of the zero-lift rolling effectiveness
of air-jet spoilers on an unswept flexible wing was conducted over a
Mach number range of 0.7 to 1.9. The tests were made to determine the
relative effectiveness of air-jet spoilers at leading-edge and trailing-
edge locations.

The leading-edge jet spoiler exhibited near-zero effectiveness at
transonic speeds and had a roll reversal between Mach numbers of 0.93
and 1.35. The trailing-edge jet spoiler was effective over the Mach
number range covered. Of the two spoiler locations, the trailing-edge
spoiler exhibited the greater effectiveness throughout the Mach number
range covered, although, near the maximum Mach number, both spoiler
locations had approximately the same rolling effectiveness.

INTRODUCTION

The Pilotless Aircraft Research Division has conducted a free-
flight investigation to determine the zero-lift rolling effectiveness
of air-jet spoilers on an unswept wing. Two models were flight tested,
one with the spoiler located at 3.75 percent of the chord (leading edge)
and the other with the spoiler located at 96.25 percent of the chord
(trailing edge). The flight tests were conducted at the Pilotless
Aircraft Research Station at Wallops Island, Va. and covered a Mach
number range of 0.7 to 1.9 and a Reynolds number range of about 3 to
10×10^6.

CONFIDENTIAL   NACA RM L57F10

The jet spoiler has an advantage over conventional controls in that low actuating forces are required. The jet spoiler may be used as a control irrespective of altitude since it provides jet reaction at very high altitudes and jet-plus-aerodynamic reaction at low altitudes. One disadvantage of jet spoilers is the ducting required, although duct requirements of the leading-edge jet spoiler in many cases may be more readily adaptable to conventional airfoils than that of a trailing-edge jet spoiler. At Mach numbers where leading-edge heating becomes a problem, the ducting and orifices of the leading-edge spoiler may be used for cooling purposes.

As with any type of spoiler, the chordwise location is important for maximum effectiveness. Most studies of spoilers of any type on unswept wings (such as ref. 1) have been conducted at chordwise locations well behind the leading edge. The trailing-edge air-jet spoiler has been found to be quite effective on two wing plan forms, a swept wing (ref. 2), and an 80° delta wing (ref. 3), whereas little or no data exist on the effectiveness of leading-edge air-jet spoilers.

SYMBOLS

A_j total jet-exit cross-sectional area of one wing panel, sq ft

C_F jet-thrust coefficient

C_{l_p} damping-in-roll coefficient, $\dfrac{\text{Rolling moment}}{\left(\dfrac{pb}{2V}\right)qSb}$, per radian

F_j jet force, lb

K magnification factor, $\dfrac{\left(\dfrac{pb}{2V}\right)_{measured}}{\left(\dfrac{pb}{2V}\right)_{jet\ reaction}}$

M Mach number

P_a static free-stream pressure, lb/sq ft

P_t stream stagnation pressure at inlet, lb/sq ft

R Reynolds number based on mean aerodynamic chord

S   total wing-plan-form area taken to model center line, sq ft

V   flight-path velocity, ft/sec

b   wing span (diameter of circle passing through center line of
              jet intakes), ft

$\frac{b'}{2}$ exposed wing semispan, ft

c   wing chord, ft

p   rolling velocity, radians/sec

q   dynamic pressure, lb/sq ft

r   radius of nose section, in.

$\frac{\theta}{L}$ wing twist caused by a uniformly distributed load, radians/lb

x   longitudinal distance along model center line, in.

y   spanwise distance measured from wing-fuselage intersection, ft

MODELS

The general arrangement of the two models and details of the jet
spoiler are shown in figure 1. Photographs of the models are shown in
figure 2.

The two models were identical except for the jet-spoiler location;
the jet spoiler was located near the leading edge at 3.75 percent of the
chord on one model and near the trailing edge at 96.25 percent of the
chord on the other. Each model had three identical magnesium wing panels
spaced 120° apart around the fuselage at 0° incidence. The diamond air-
foil section was 5 percent thick with 3/16-inch-radius rounded leading
and trailing edge. A thin wooden overlay was cycle-welded to the mag-
nesium wings to form a continuous surface with the sheet metal (1/16-
inch steel) ducts. The wings were unswept and had a taper ratio of 1
and an aspect ratio of 2.72 based on the included area of two wing panels.
The fuselage had an ogive nose (ordinates given in table I) and a cylin-
drical afterbody. The model weights were 46.0 pounds for the leading-
edge spoiler and 45.2 pounds for the trailing-edge spoiler.

Each wing panel had an inlet which was a round steel tube, and the
inlet area was 0.526 square inch. The jets were formed by 55 equally
spaced holes 3/32 inch in diameter (see figs. 2(c) and 2(d)). The ratio
of jet area to inlet area was 0.735.

FLIGHT-TESTING TECHNIQUE

The test measurements of zero-lift rolling effectiveness were
obtained by the rocket-model technique and covered a Mach number range
of 0.7 to 1.9. A single ABL Deacon rocket booster accelerated the model
to the maximum Mach number. As the model decelerated through the Mach
number range, measurements were made of the velocity by means of a
CW Doppler velocimeter and of rolling velocity by means of spinsonde
radio equipment. These data in conjunction with rawinsonde information
and space coordinates, obtained with a modified SCR-584 radar unit, per-
mitted an evaluation of the Mach number and the wing-tip helix angle as
functions of time.

The test conditions for both models are shown in figure 3. Although
the models were built to roll in a counterclockwise direction when viewed
from the rear (negative roll direction), the values of the wing-tip helix
angle are presented as positive if the model rolled in the direction
intended. Negative values of $pb/2V$ indicated roll reversal.

ACCURACY AND CORRECTIONS

Calculations and flight experience on zero-lift models indicate that
the experimental results are accurate to within the following limits:

	Subsonic	Supersonic
M	±0.01	±0.01
$\frac{pb}{2V}$, radians	±0.003	±0.002

Corrections to data for the wing-tip helix angle to account for
small variations from 0° in wing incidence were found to be negligible.
Inertia effects on the experimental values are believed to be negligible
everywhere except in the regions where there are large changes in rolling
velocity (near $M = 0.9$). In the region where the greatest changes in
rolling velocity are experienced, the measured values may be in error by
as much as 20 percent.

DECLASSIFIED

RESULTS AND DISCUSSION

Preflight

Prior to flight testing, one magnesium wing panel was tested to determine the degree of flexibility. The results of this test are presented in figure 4 as the spanwise variation of twist per pound due to a uniform load distributed along the leading-edge and trailing-edge jet positions, and the 25 percent and 75 percent chord lines. The elastic axis was found to be approximately the 50 percent chord line at all spanwise locations.

From the magnitude of the twist angle per pound, it may be noted that the wing cannot be considered rigid for model flight-test conditions; however, the data presented herein are uncorrected for aeroelastic effects. In order to determine aeroelastic corrections, knowledge of the chordwise and spanwise load distributions resulting from spoiling and aeroelasticity must be known. In the present investigation, corrections to the data for aeroelastic effects without pressure distributions and force tests are beyond the scope intended. It is believed, generally, that corrections to the data for aeroelastic effects would decrease the effectiveness of the leading-edge spoiler and increase the effectiveness of the trailing-edge spoiler.

Flight

The variation of the rolling effectiveness (wing-tip helix angle) of the leading-edge and trailing-edge spoiler is shown in figure 5 as a function of Mach number. Also included in this figure are the results from an investigation on the leading-edge and trailing-edge aileron of an unswept wing (ref. 4). The magnitudes of the rolling effectiveness from each investigation should not be compared since the aileron values are presented as rolling effectiveness per degree of aileron deflection. It may be noted, however, that the effectiveness of the leading-edge jet spoiler is quite similar to that of the leading-edge aileron of reference 4. The leading-edge jet spoiler has near-zero effectiveness at transonic speeds and exhibits a roll reversal between Mach numbers of 0.93 and 1.35. Throughout the Mach number range covered, the trailing-edge jet spoiler, like the trailing-edge aileron, exhibited greater effectiveness than the leading-edge spoiler or aileron, except near the maximum Mach number where both spoiler locations had approximately the same rolling effectiveness. The fact that the rolling effectiveness of the two spoiler locations was approximately the same at the maximum Mach number is probably due to the wing aeroelastic characteristics of the test models.

    Presented in figure 6 is the variation of the estimated jet force
per wing panel as a function of Mach number. The value of C_F was
obtained from the test of reference 3 at approximately the same ratio
of jet area to inlet area. The estimated jet force per wing panel varied
with Mach number from about 1 pound at $M = 0.7$ to about 17 pounds at
$M = 1.9$.

    The variation of the rolling effectiveness of both spoiler locations
and the rolling effectiveness caused by jet reaction alone as a function
of Mach number is shown in figure 7. The rolling effectiveness of the
jet reaction was obtained from the data of figure 6 and C_{l_p} of refer-
ence 5. At Mach numbers from 0.85 to 1.50, the leading-edge spoiler
exhibited less rolling effectiveness than the jet reaction alone.

    The magnification factor K presented as a function of Mach number
in figure 8, was obtained by dividing the measured values of $pb/2V$ for
each spoiler location by the $pb/2V$ value due to jet reaction alone.
On rigid wings, a value of K of one indicates that all the rolling
effectiveness is obtained from jet reaction and none from spoiling action.
Negative values of K indicate roll in a direction opposite to that due
to jet reaction. Over the Mach number range covered, the trailing-edge
spoiler exhibited values of K greater than one. In the transonic speed
region, the trailing-edge spoiler had 10 to 14 times the rolling effec-
tiveness of that due to jet reaction alone. The leading-edge spoiler
exhibited values of K less than ±2 over most of the Mach number range
covered.

                              CONCLUDING REMARKS

    The results of a free-flight investigation to determine the relative
zero-lift roll effectiveness of leading-edge and trailing-edge air-jet
spoiler location on a relatively flexible wing indicate the following
concluding remarks. The leading-edge jet spoiler exhibited near-zero
effectiveness in the transonic speed range and had a roll reversal
between Mach numbers of 0.93 to 1.35. The trailing-edge jet spoiler
was effective over the Mach number range covered. Of the two spoiler
locations, the trailing-edge spoiler exhibited the greater effectiveness
throughout the Mach number range covered, although near the maximum Mach

number, both spoiler locations had approximately the same rolling effectiveness.

Langley Aeronautical Laboratory,
     National Advisory Committee for Aeronautics,
         Langley Field, Va., May 20, 1957.

REFERENCES

1. Lord, Douglas R., and Czarnecki, K. R.: Pressure Distributions and Aerodynamic Characteristics of Several Spoiler-Type Controls on a Trapezoidal Wing at Mach Numbers of 1.61 and 2.01. NACA RM L56E22, 1956.

2. Lowry, John G.: Recent Control Studies. NACA RM L55L22a, 1956.

3. Schult, Eugene D.: Free-Flight Investigation at Mach Numbers Between 0.5 and 1.7 of the Zero-Lift Rolling Effectiveness and Drag of Various Surface, Spoiler, and Jet Controls on an 80° Delta-Wing Missile. NACA RM L56H29, 1956.

4. Strass, H. Kurt: Free-Flight Investigation of the Rolling Effectiveness at High Subsonic, Transonic, and Supersonic Speeds of Leading-Edge and Trailing-Edge Ailerons in Conjunction With Tapered and Untapered Plan Forms. NACA RM L8E10, 1948.

5. Bland, William M., Jr., and Dietz, Albert E.: Some Effects of Fuselage Interference, Wing Interference, and Sweepback on the Damping in Roll of Untapered Wings As Determined by Techniques Employing Rocket-Propelled Vehicles. NACA RM L51D25, 1951.

TABLE I
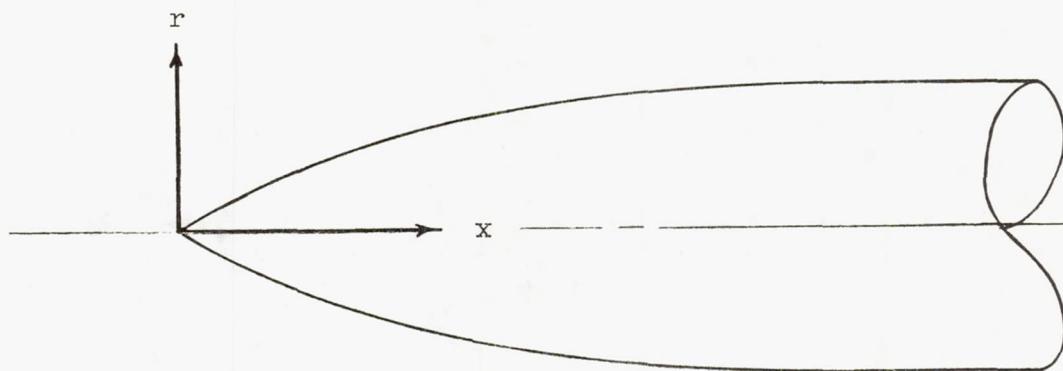
NOSE ORDINATES

x, in.	r, in.
0	0
2.50	.590
5.00	1.150
7.50	1.570
10.00	1.995
12.50	2.252
15.00	2.429
17.50	2.500
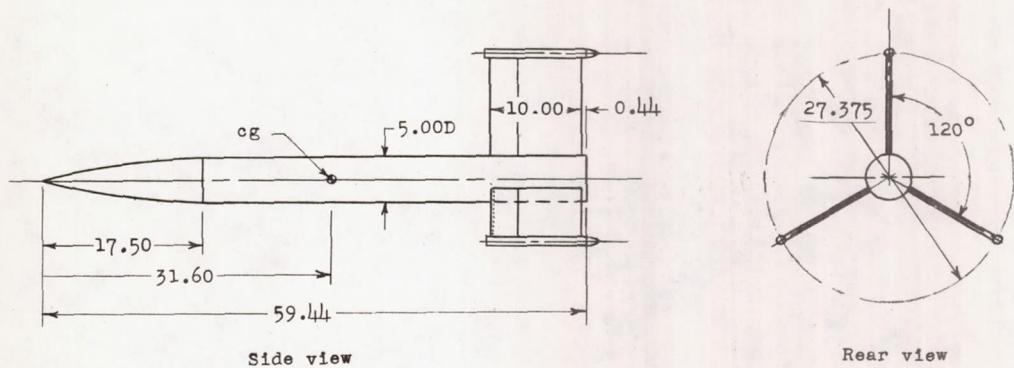
(a) Leading-edge jet-spoiler model.
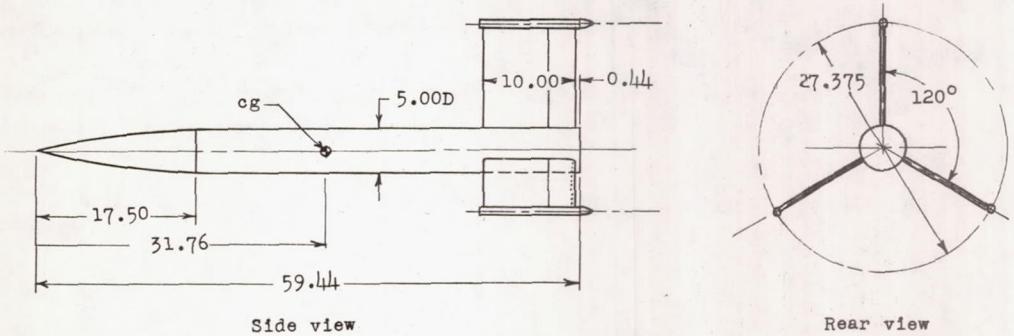
(b) Trailing-edge jet-spoiler model.
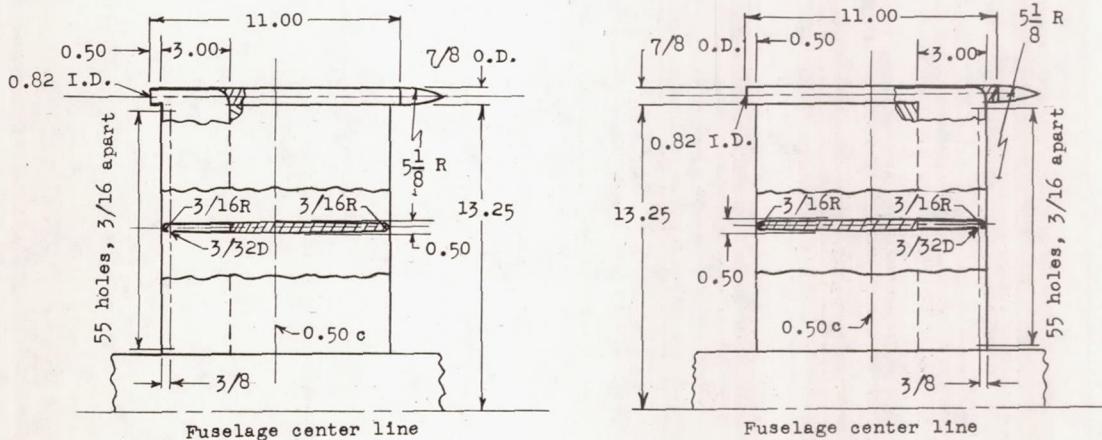
(c) Leading-edge jet-spoiler
details.

(d) Trailing-edge jet-spoiler
details.

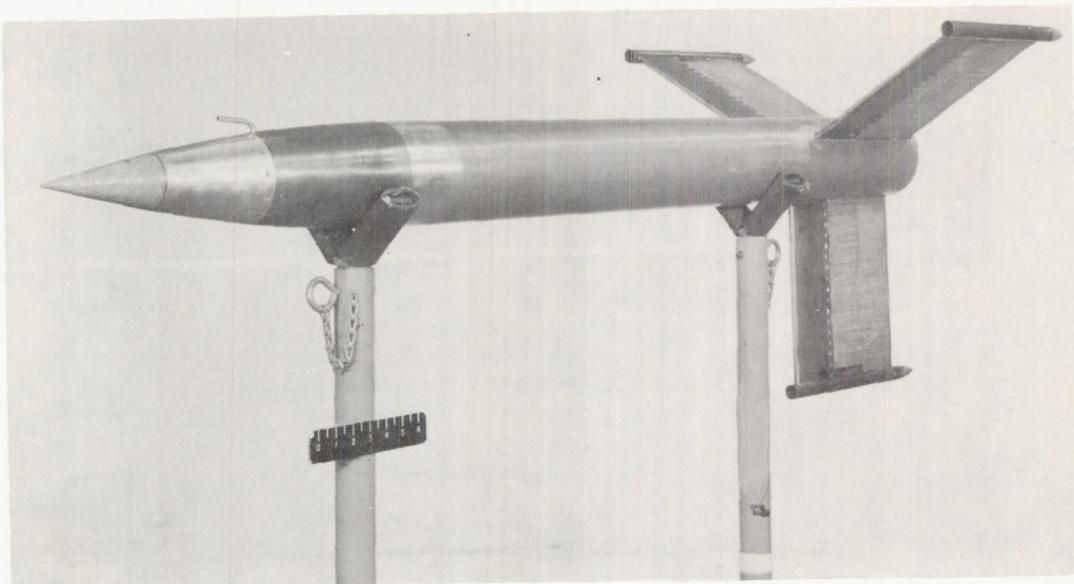Figure 1.- General arrangement and details of leading-edge and trailing-edge jet-spoiler models. All linear dimensions in inches.

CONFIDENTIAL NACA RM L57F10

(a) Three-quarter front view of leading-edge-spoiler model.
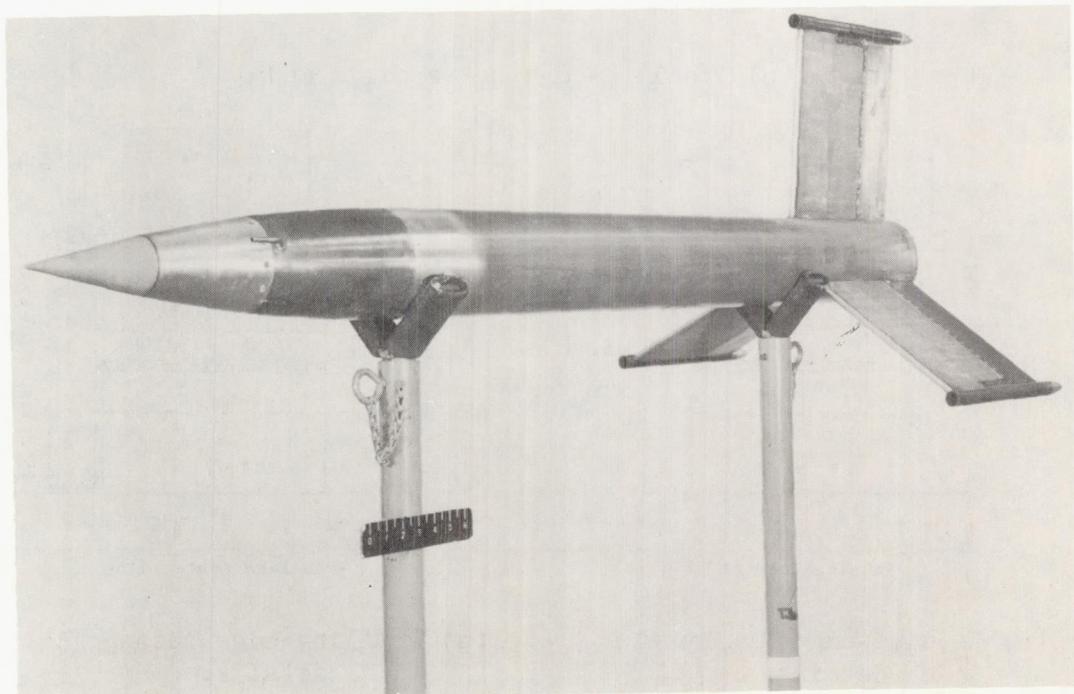
(b) Three-quarter front view of trailing-edge-spoiler model.   L-57-1596

Figure 2.- Photographs of models.
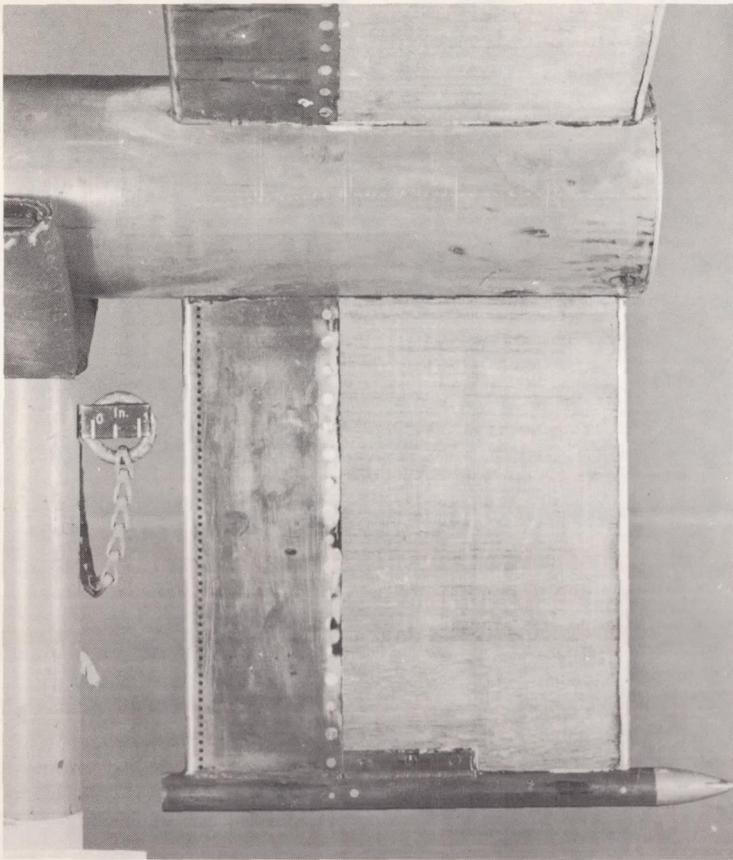
(c) Leading-edge-spoiler panel.
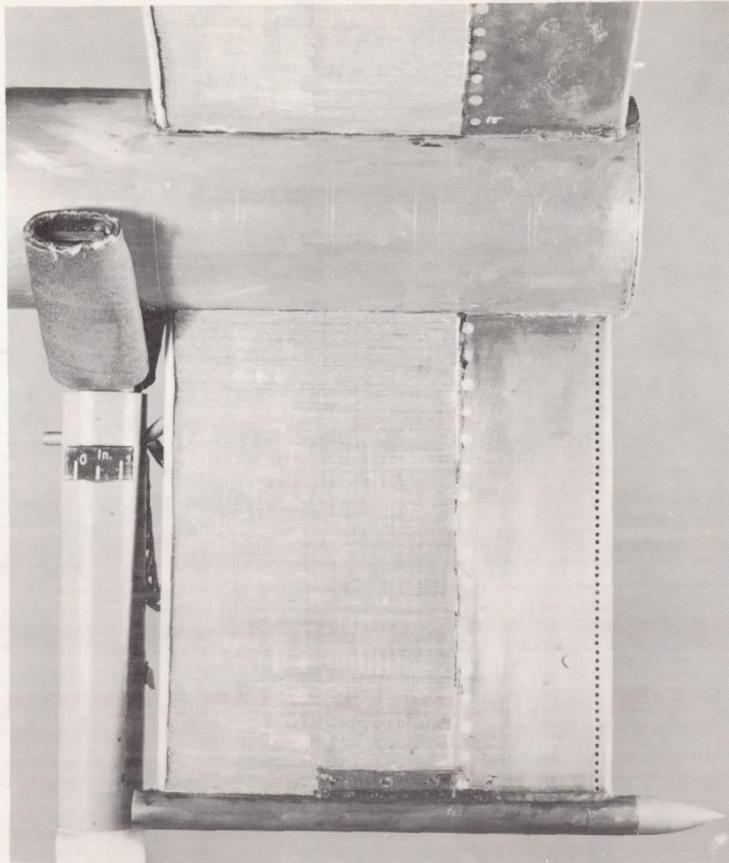
(d) Trailing-edge-spoiler panel.   L-57-1597

Figure 2.- Continued.
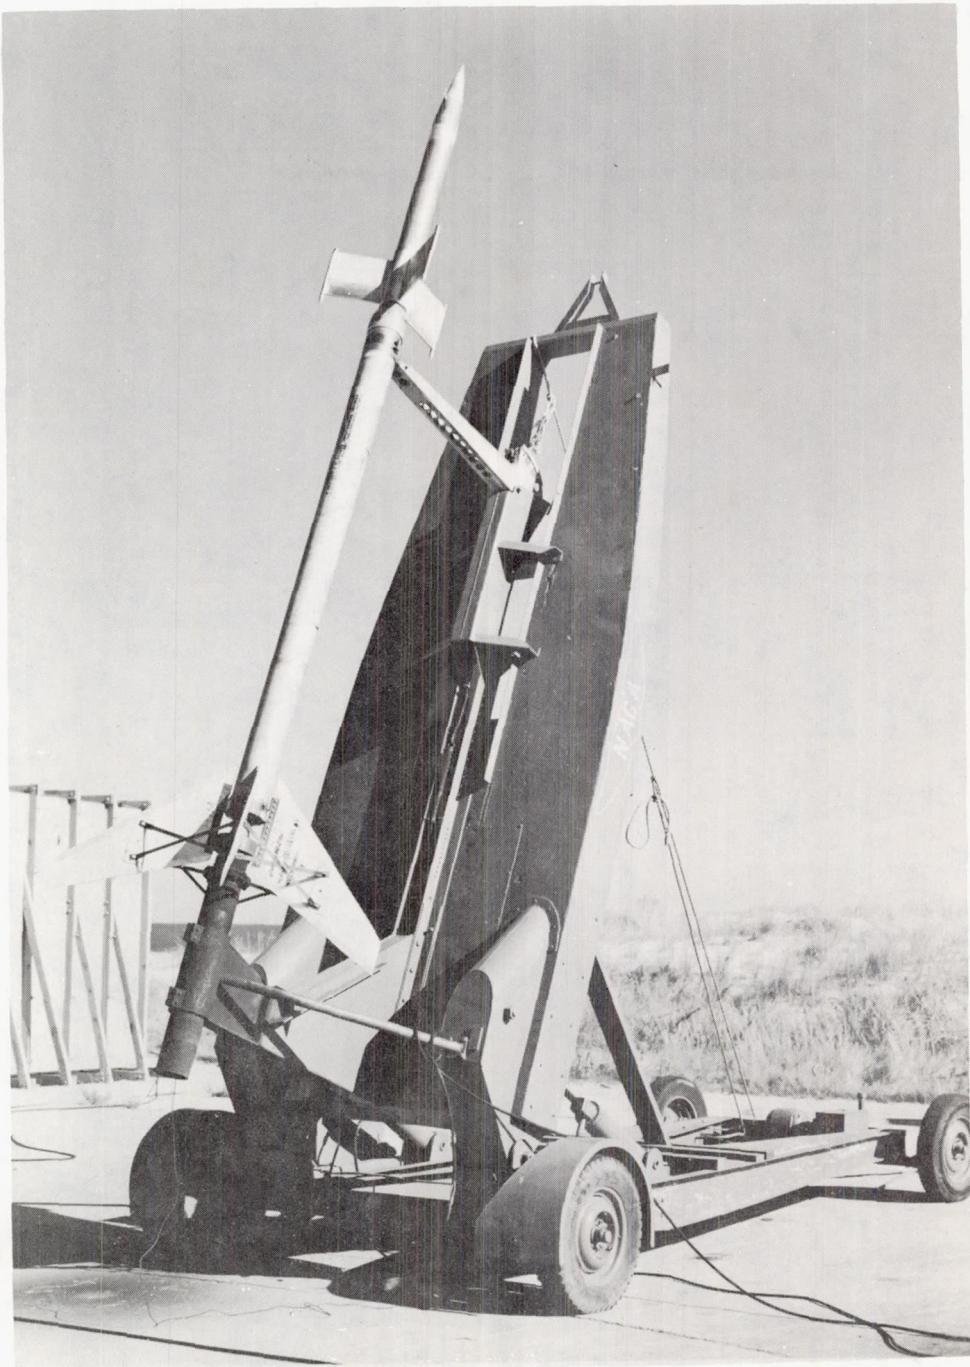
L-96114

(e) Trailing-edge-spoiler model on launcher.

Figure 2.- Concluded.
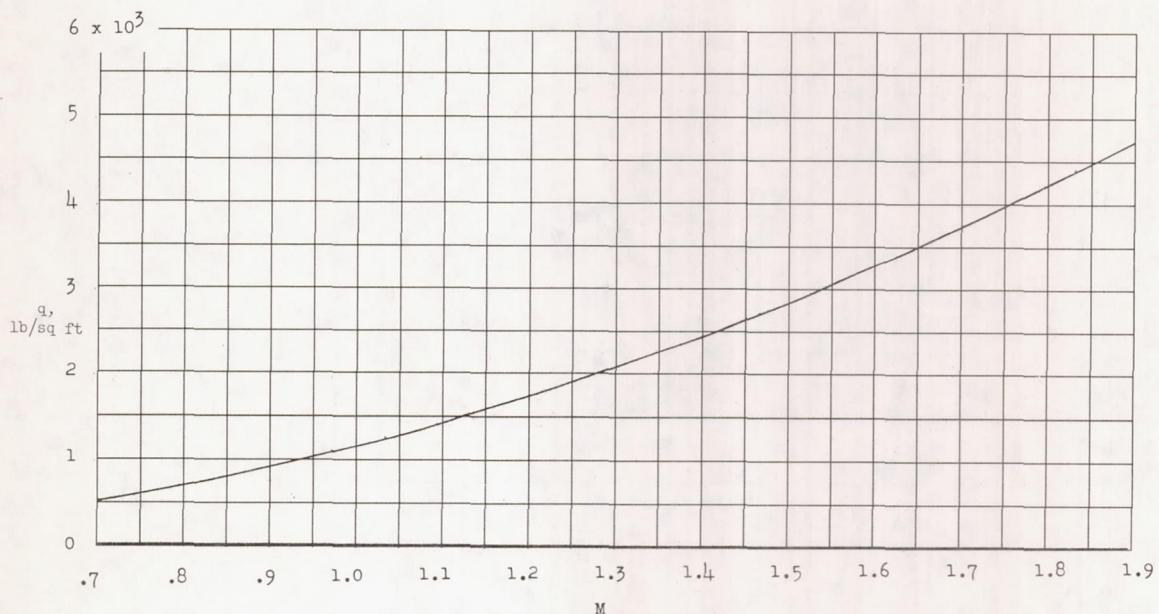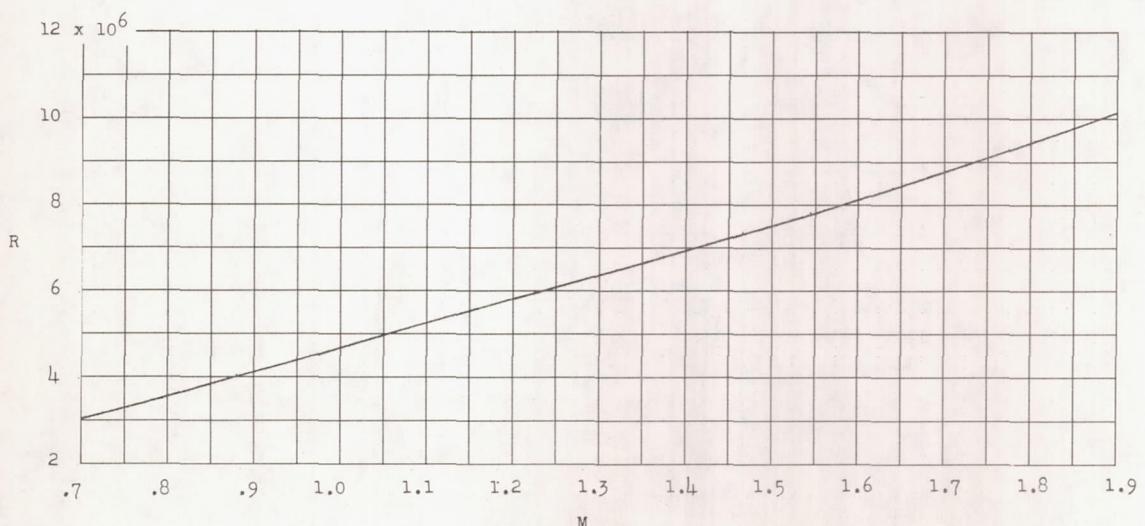
(a) Dynamic pressure.

(b) Reynolds number.

Figure 3.- Variation of dynamic pressure and Reynolds number with Mach number.
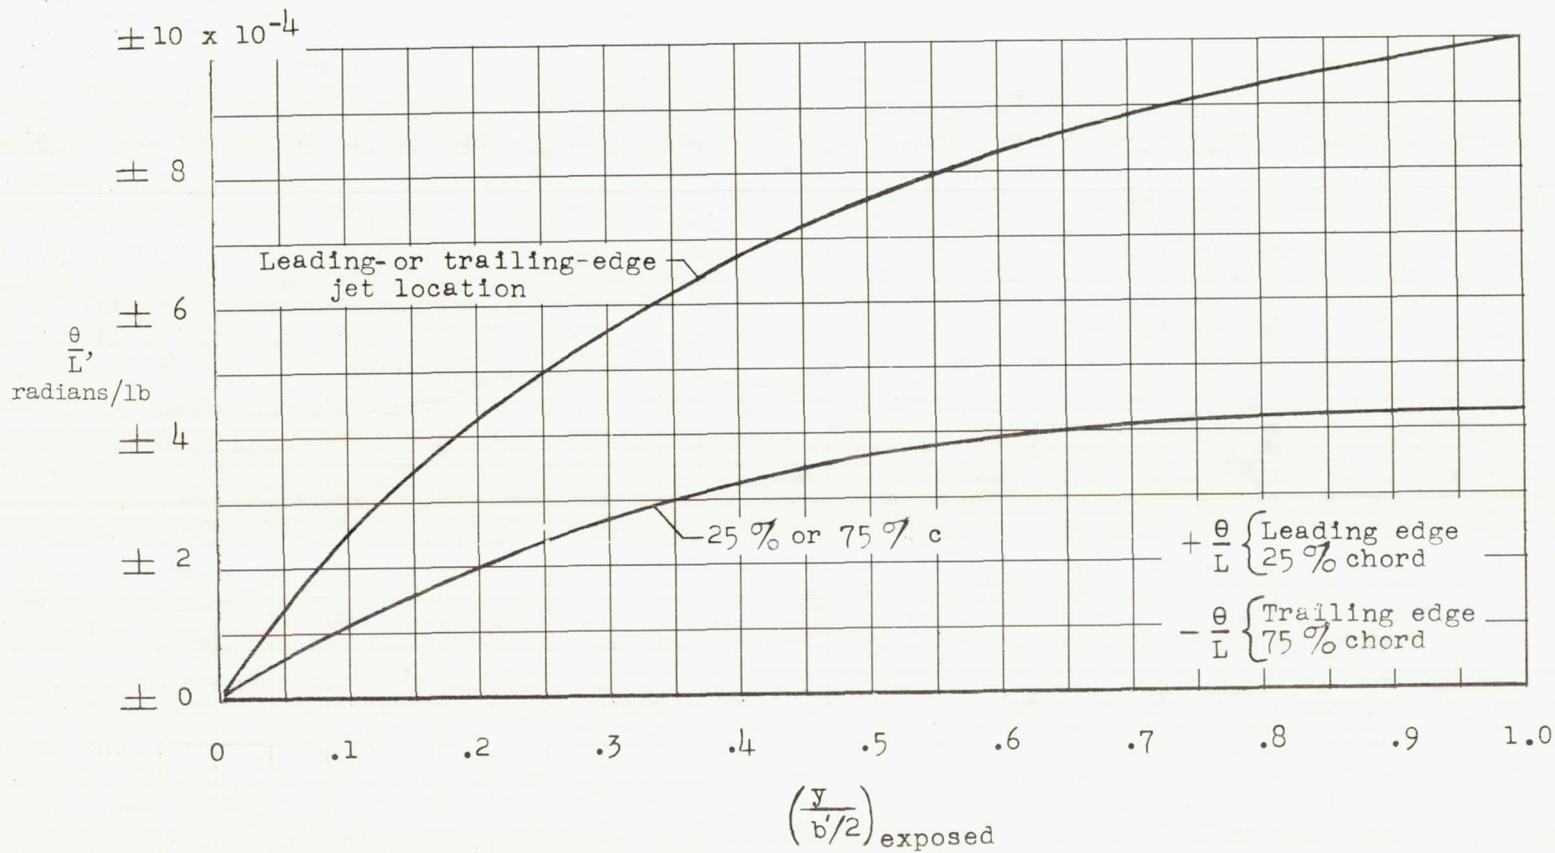
Figure 4.- Variation of wing twist with spanwise location for a uniform load distributed along the leading-edge and trailing-edge jet positions and the 25 percent and 75 percent chord lines.
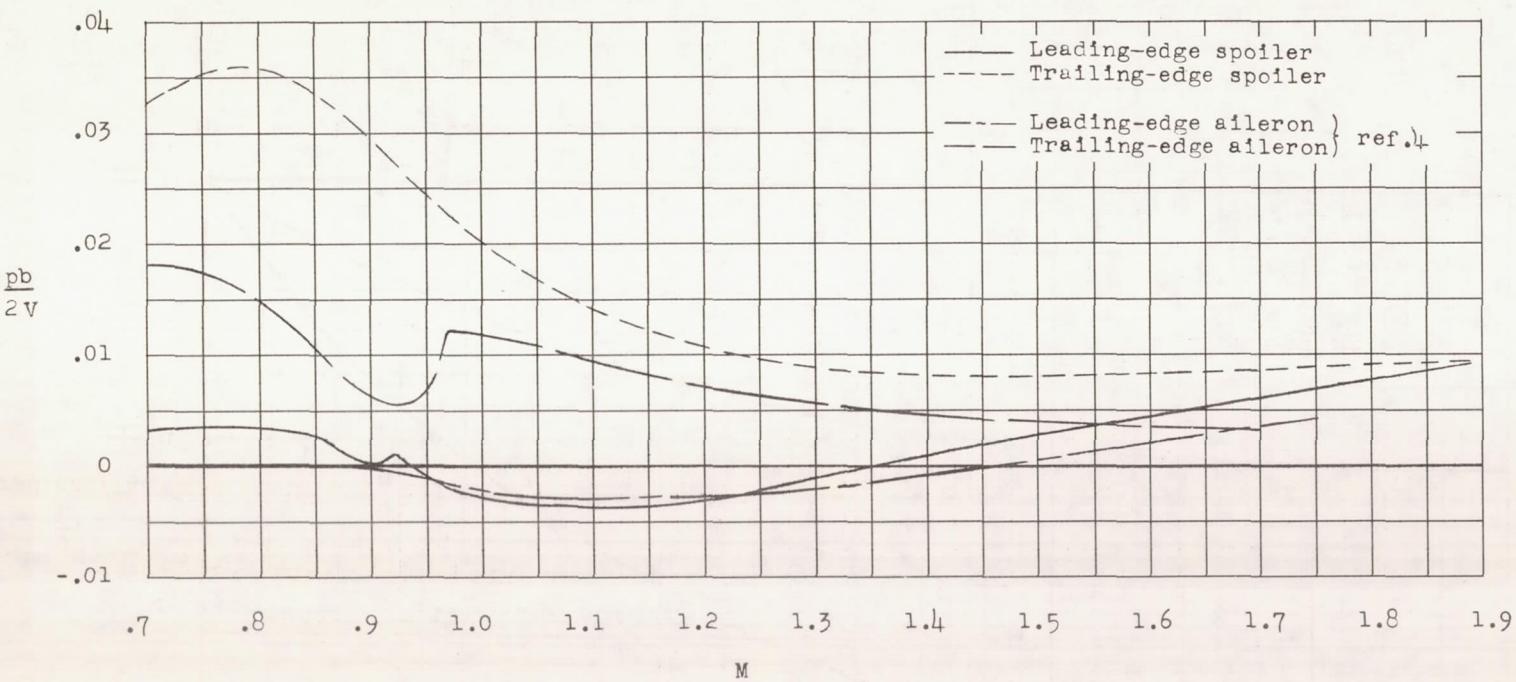
Figure 5.- Variation of rolling effectiveness of leading-edge and trailing-edge air-jet spoilers and ailerons (deflected 1°).
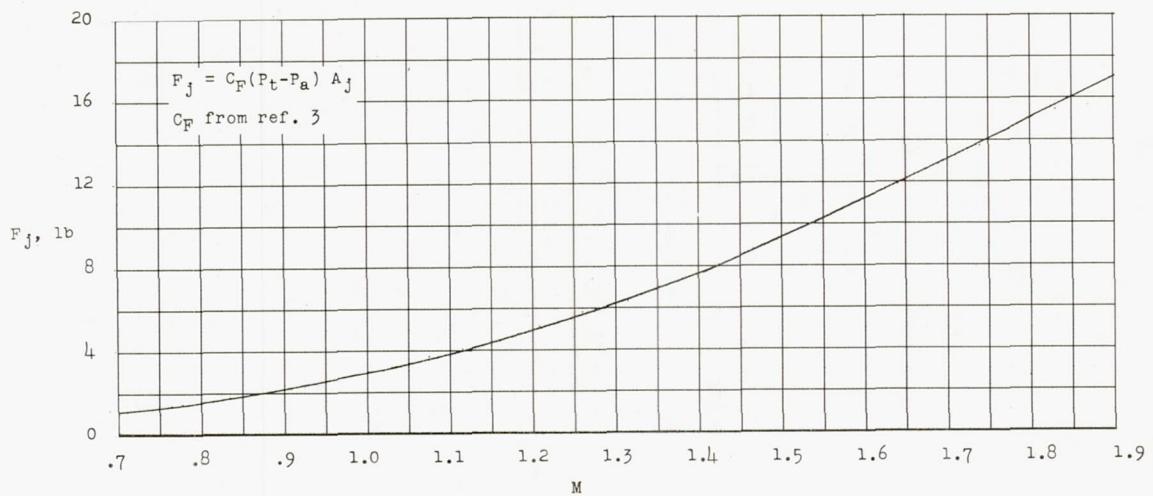
$$F_j = C_F (P_t - P_a) A_j$$
C_F from ref. 3

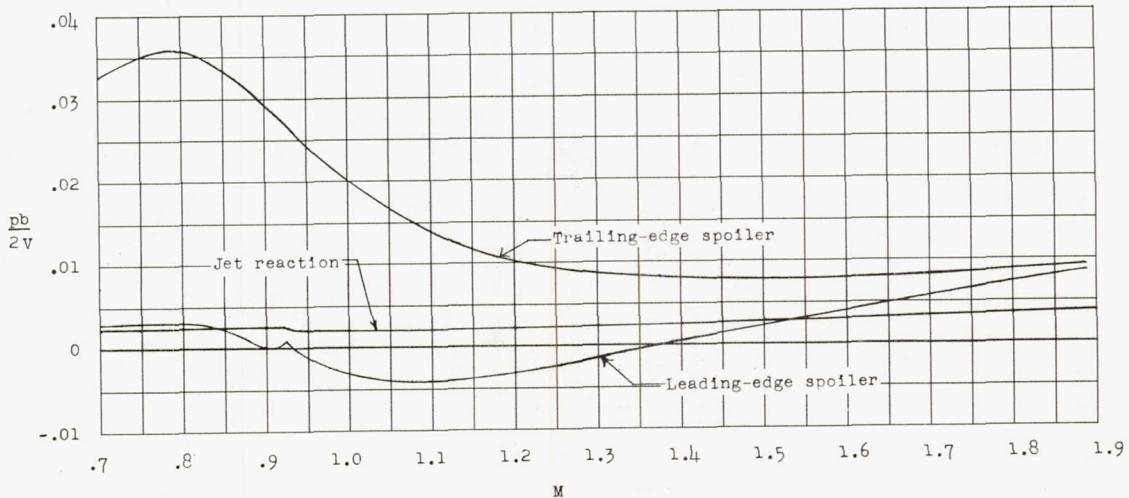Figure 6.- Variation with Mach number of leading-edge and trailing-edge jet force per wing panel.

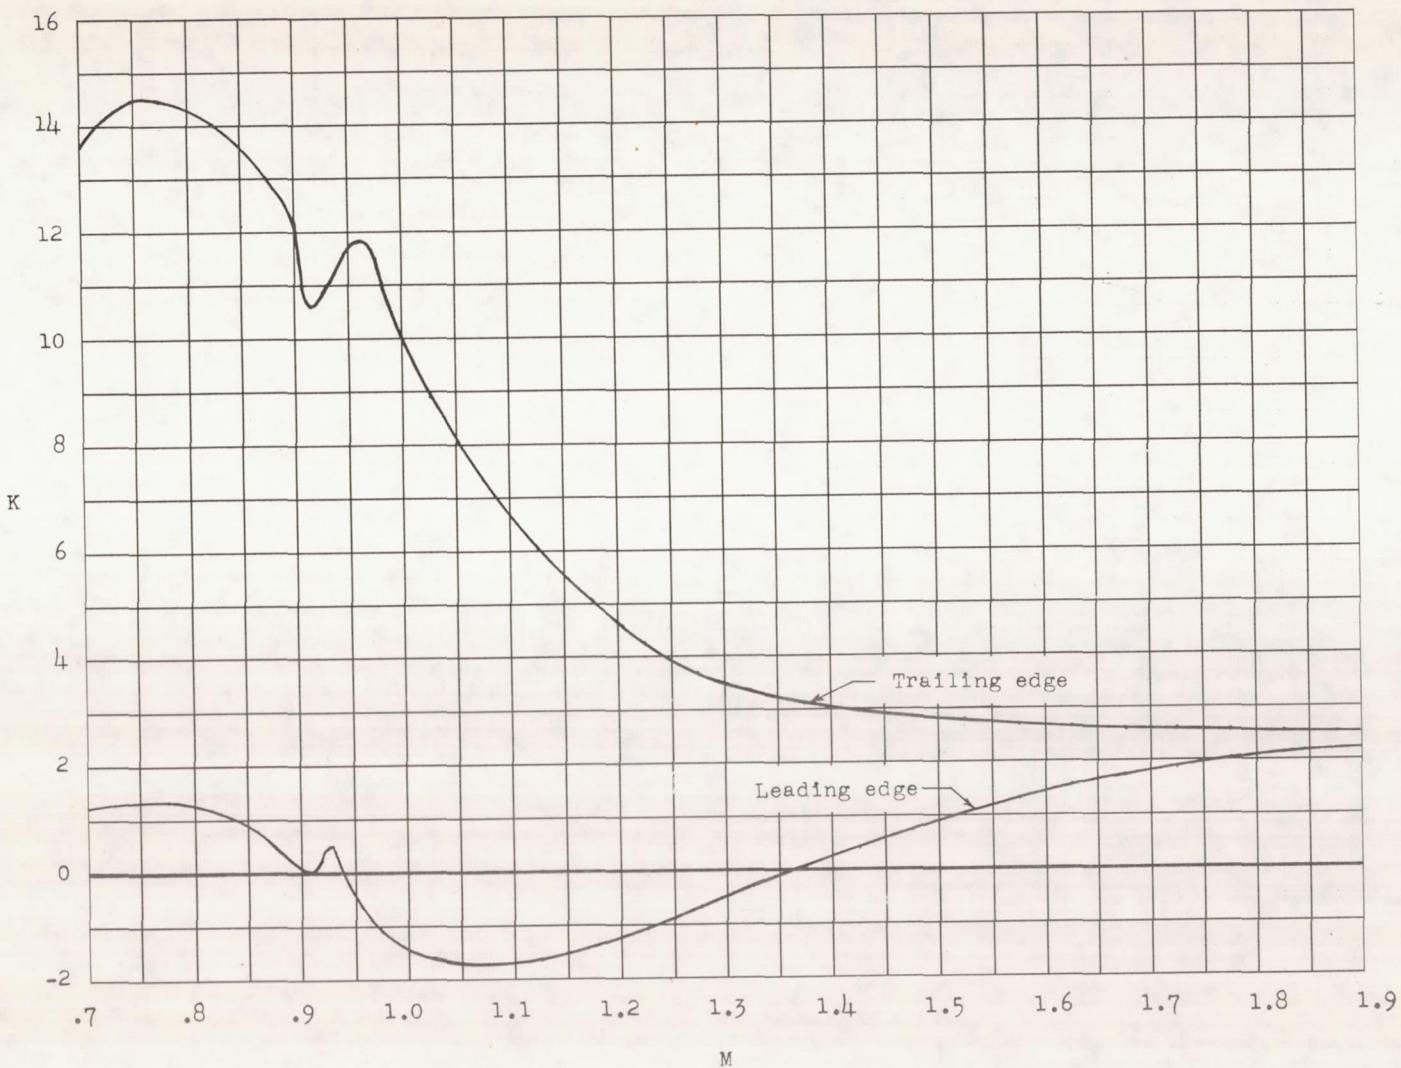Figure 7.- Variation with Mach number of pb/2V of each model and pb/2V caused by jet reaction.

Figure 8.- Variation with Mach number of the magnification factor K for each model.